



Lexmark XM3150

Power up your productivity with the Lexmark XM3150. With solutions and 2-sided printing, plus fast processing, print, copy and scan speeds, it can help propel your business forward.

Part Number

3084940

Print Technology

Monochrome Laser

Function

Color Scanning, Copying, Faxing, Network Scanning, Printing

Workgroup Size

Medium Workgroup

Touch Screen Display

Yes

Display

Lexmark e-Task 17.8 cm (7-inch) colour touch screen

Print Speed (A4, Black)

Up to 47 ppm⁶

Print Speed (A4, Black) Duplex

Up to 20 spm⁶

Time to First Page (Black)

As fast as 6.5 seconds

Duplex (2-sided) Printing

Integrated Duplex

Print Resolution, Black

1200 Image Quality, 1200 x 1200 dpi, 2400 Image Quality, 600 x 600 dpi

Copy Speed (A4, Black)

Up to 47 cpm⁶

Copy Speed (A4, Black) Duplex

Up to 23 spm⁶

Time to First Copy (Black)

As fast as 6.5 seconds

Reduce / Enlarge Range

25 - 400 %

A4/Ltr Simplex Scan Speed (Black)

Up to 45 / 48 Sides per minute

A4/Ltr Simplex Scan Speed (Colour)

Up to 30 / 32 Sides per minute

A4/Ltr Duplex Scan Speed (Black)

Up to 20 / 21 Sides per minute

A4/Ltr Duplex Scan Speed (Colour)

Up to 13 / 14 Sides per minute

Scan Area, Maximum (mm)

215.9 x 355.6 mm

ADF Scan

RADF (reversing Duplex)

Scanner Type

Flatbed scanner with ADF

Scan Technology

CCD

Optical Scanning Resolution

up to 600 X 600 ppi (color), up to 1200 X 600 ppi (black)

Scan File Formats (Send as)

JPEG, JPG, PDF, Secure PDF, TIFF, XPS, Archival PDF (A-1a, A-1b), Searchable PDF (optional OCR with 1GB RAM and hard disk required), Highly compressed PDF (1GB RAM and hard disk required)

Scan Destinations

e-mail, FTP, USB Flash drive, USB or Network connected computer, Lexmark Document Solutions Suite (LDSS)

Modem Speed

ITU T.30, V.34 Half-Duplex, 33.6 Kbps

Fax Transmission Speed

< 3 seconds per page

Processor

Dual Core, 800 MHz

Memory, Standard

1024 MB

Memory, Maximum

3072 MB

Hard Disk

Option available

Apple Operating Systems Supported

Apple OS X (10.5, 10.6, 10.7, 10.8, 10.9, 10.10)

Citrix MetaFrame

Microsoft Windows Server 2003 running Terminal Services with Citrix Presentation Server 3.0, 4.0, 4.5, Microsoft Windows Server 2003 x64 running Terminal Services with Citrix Presentation Server 4.0 x64, 4.5 x64, Microsoft Windows Server 2003 and 2003 X64 Edition with Citrix XenApp 5.0, Microsoft Windows Server 2008 and 2008 X64 Edition with Citrix XenApp 5.0, Microsoft Windows Server 2008 R2 with Citrix XenApp 6.0, 6.5

Linux Operating Systems Supported

SUSE Linux Enterprise Server 10, 11, SUSE Linux Enterprise Desktop 10, 11, Red Hat Linux Desktop 6.0, Linpus Linux Desktop 9.6, Debian GNU/Linux 5.0, 6.0, Red Hat Enterprise Linux WS 4.0, 5.0, 6.0, Ubuntu 11.04, 11.10, 12.04, 12.10, openSUSE 11.3, 11.4, 12.1, 12.2, PCLinuxOS 2011, Mint 9, 10, 11, 12, 13, Fedora 14, 15, 16, 17

Microsoft Windows Operating Systems Supported

Windows XP, Windows Server 2003, Windows XP x64, Windows Server 2003 x64, Windows Vista, Windows Vista x64, Windows Server 2008, Windows Server 2008 x64, Windows 7, Windows 7 x64, Windows Server 2008 R2, Windows 8, Windows 8 x64, Windows Server 2012, Windows 8.1, Windows 8.1 x64, Windows Server 2012 R2, Windows RT, Windows RT 8.1

Novell Operating Systems Supported

Novell NetWare 6.5 Open Enterprise Server, Novell NetWare 5.1(SP 6+), 6.0(SP 3+) with Novell Distributed Print Services (NDPS), Novell Open Enterprise Server on SUSE Linux Enterprise Server

UNIX Operating Systems Supported

Sun Solaris SPARC 9, 10, HP-UX 11.11, 11.23, 11.31, Sun Solaris x86 10, 11, IBM AIX 5.3, 6.1, 7.1

Included Paper Handling

550-Sheet Input, 100-Sheet Multipurpose Feeder, Integrated Duplex, 250-Sheet Output Bin

Optional Paper Handling

250-Sheet Tray, 550-Sheet Tray, 550-Sheet Lockable Tray, Inline Stapler

Paper Input Capacity, Standard

Up to 650 pages 75 gsm bond

Paper Input Capacity, Maximum

Up to 2300 pages 75 gsm bond

Paper Output Capacity, Standard

Up to 250 pages 75 gsm bond

Paper Output Capacity, Maximum

Up to 250 pages 75 gsm bond

Paper Weight Range Supported - Standard Tray (gsm)

60 - 120 gsm

ADF

50-Sheet Automatic Document Feeder

ADF Paper Input Capacity

Up to 50 pages 75 gsm bond

ADF Paper Output Capacity

Up to 50 pages 75 gsm bond

Finishing Option

Yes

Number of Paper Inputs, Standard

2

Number of Paper Inputs, Maximum

5

Media Types Supported

Card Stock, Envelopes, Paper Labels, Plain Paper, Transparencies, Refer to the Card Stock & Label Guide.

Media Sizes Supported

10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, DL Envelope, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Oficio, A6

Standard Ports

One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear USB 2.0 Specification Hi-Speed Certified port (Type A)

Optional Local Ports

Internal RS-232C serial, Internal 1284-B Bidirectional Parallel

Optional Network Ports

Internal MarkNet N8350 802.11b/g/n Wireless

Direct USB

Yes

Ethernet Network

Yes

Network Protocol Support

TCP/IP IPv4, AppleTalk™, TCP/IP IPv6, TCP, UDP

Network Printing Methods

LPR/LPD, Direct IP (Port 9100), Enhanced IP (Port 9400), Secure IP (Port 96xx), FTP, TFTP, ThinPrint .print integration, IPP 1.0, 1.1, 2.0 (Internet Printing Protocol), Microsoft Web Services WSD, Pull Printing

Network Management Protocols¹

HTTP, HTTPS (SSL/TLS), SNMPv1, SNMPv2c, SNMPv3, WINS, IGMP, BOOTP, RARP, APIPA (AutoIP), DHCP, ICMP, DNS, Bonjour, DDNS, mDNS, ARP, NTP, Telnet, Finger,

Network Security

SNMPv3, 802.1x Authentication: MD5, MSCHAPv2, LEAP, PEAP, TLS, TTLS, IPSec

Printable Area (metric)

4.0 mm of the top, bottom, right and left edges (within)

Printer Languages (Standard)

PCL 5e Emulation, PCL 6 Emulation, Personal Printer Data Stream (PPDS), PostScript 3 Emulation, Direct Image, Microsoft XPS (XML Paper Specification), AirPrint™, PDF 1.7 emulation

Fonts and Symbol Sets

3 of 9 scalable PCL 5e fonts in Narrow, Regular and Wide, 2 PCL bitmap fonts, 39 scalable PPDS fonts, 5 PPDS bitmap fonts, 84 scalable PCL fonts, OCR-A, OCR-B scalable PCL 5e fonts, For more information, refer to the Technical Reference., 91 scalable PostScript fonts

Laser Cartridge Yields (up to)⁵

16,000-page Extra High Yield Cartridge,

Imaging Unit Estimated Yield

Up to 60000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage⁴

Cartridge(s) Shipping with Product

7,500-page Starter Return Program Toner Cartridge

Packaged Size (mm - H x W x D)

673 x 572 x 599 mm

Packaged Weight (kg)

28 kg

Size (mm - H x W x D)

561 x 489 x 479 mm

Weight (kg)

23.6 kg

Noise Level, Idle

Inaudible dBA

Noise Level (Print), Operating

55 dBA

Duplex Print Noise Level, Operating

54 dBA

Noise Level (Copy), Operating

56 dBA

Noise Level (Scan), Operating

55 dBA

Quiet Mode

50 dBA

ENERGY STAR

Yes

Average Power (Hibernate Mode)

0.4 watts

Average Power (Sleep Mode)

3.3 watts

Average Power (Ready Mode)

16 watts

Average Power (Printing)

640 watts

Average Power while Printing Duplex

460 watts

Average Power (Copying)

660 watts

Average Power (Scanning)

35 watts

ENERGY STAR Typical Electricity**Consumption (TEC)**

2.7 kilowatt-hours per week

Product Guarantee

1-year Onsite Service + 3-years Parts Only guarantee (Maintenance Kit included)

Product Certifications

ENERGY STAR, Blue Angel RAL-UZ-171, ICES-003 Class B, BSMI Class B, VCCI Class B, US FDA, UL 60950-1, FCC Class B, cUL CAN/CSA-C22.2 60950-1, NOM, CB EN/IEC 60950-1, CB EN/IEC 60825-1, CE DoC (EN 62301 Class B, EN 62311, CE EN/IEC 60950-1, CE EN/IEC 60825-1, EN 61000-3, EN 55022 Class B, EuP, EN 55024, UL), EFTA (CE), KCC, CCC, CECP, CEL, C-tick DoC, UL-AR, KC mark, UL GS mark, EC 1275, MET-I, ISO 532B, ECMA-370, TED, GOST-R, SII, TER

Maximum Monthly Duty Cycle

Up to 175000 pages per month³

Recommended Monthly Page Volume

2000 - 15000 pages²

Specified Operating Environment

Temperature: 16 to 32°C (60 to 90°F), Humidity: 8 to 80% Relative Humidity, Altitude: 0 - 2896 Meters (9,500 Feet)

License/Agreement Terms

Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/printerlicense for details.

Country of Origin

China (PR)

UNSPSC Code

43212110

¹This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (<http://www.openssl.org/>)


²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage.

³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs.

⁴Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity.

⁵Average yield based on approximately 5% print coverage.

⁶Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds.

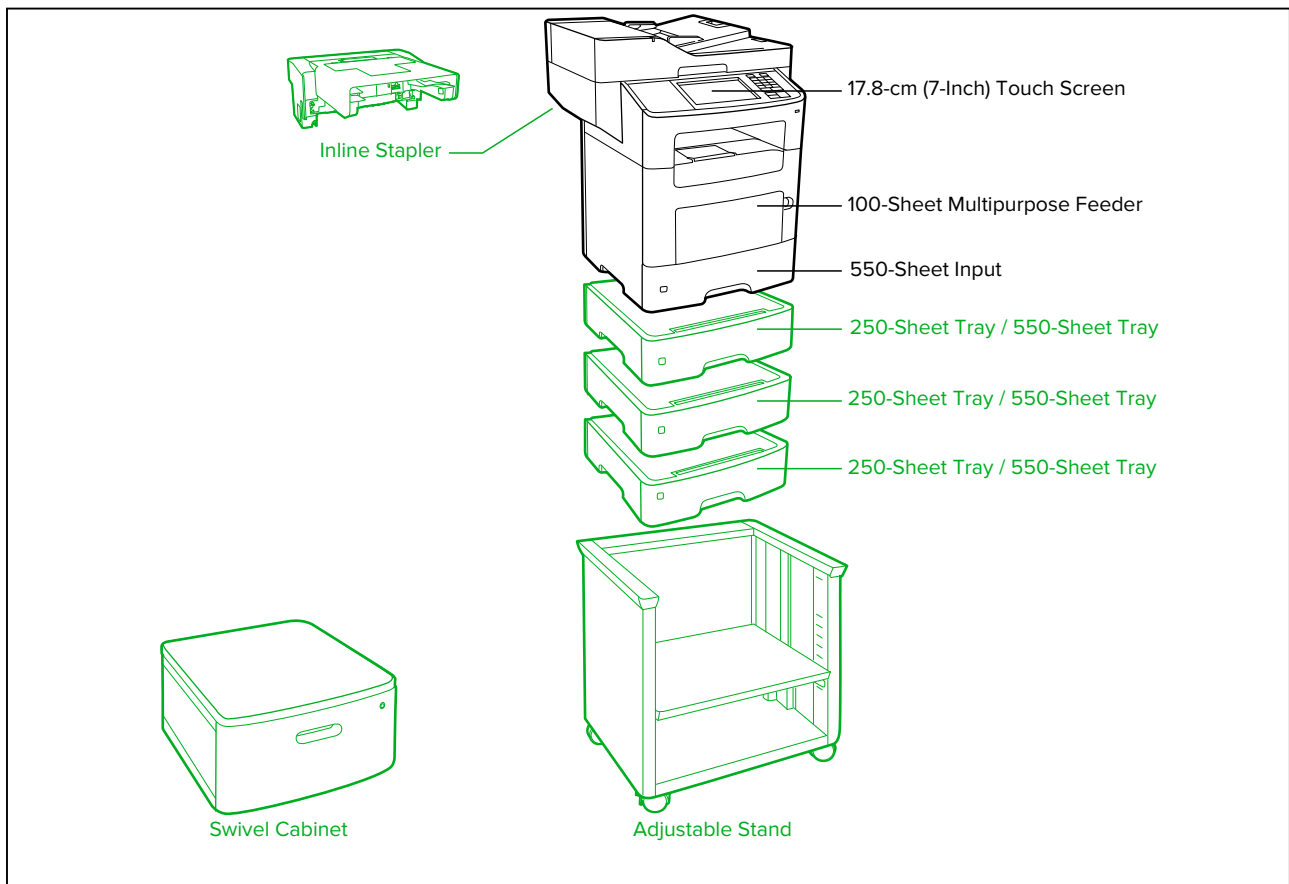

Standard
 Optional

P/N Toner Cartridges

35S8500	Staple Cartridges
24B6040	Imaging Unit
24B6186	M3150, XM3150 Toner Cartridge

P/N Paper Handling

35S0267	250-Sheet Tray
35S0567	550-Sheet Tray
35S8000	MX61x Stapler
35S0367	550-Sheet Lockable Tray

P/N Furniture

3073173	Swivel Cabinet
35S8502	Adjustable Stand

P/N Memory Options

57X9016	1024MBx32 DDR3-DRAM
57X9012	2048MBx32 DDR3-DRAM
57X9101	256MB Flash Memory Card
57X9110	Traditional Chinese Font Card
57X9112	Simplified Chinese Font Card
57X9114	Korean Font Card
57X9115	Japanese Font Card
27X0210	320+ GB Hard Disk

P/N Application Solutions

57X0300	Contact Authentication Device
57X0301	Contactless Authentication Device
35S6851	MX610, MX611 Card for IPDS
35S6850	MX610, MX611 Forms and Bar Code Card
35S6852	MX610, MX611 Card for PRESCRIBE Emulation

P/N Connectivity

1021231	Parallel (10') Cable
---------	----------------------

P/N Connectivity

1021294	USB (2 Meter) Cable
27X0901	Parallel 1284-B Interface Card
27X0900	RS-232C Serial Interface Card
27X0903	Lexmark MarkNet N8350 802.11b/g/n Wireless
27X0327	MarkNet N8350 Wireless Print Server plus NFC
SPD0002	Surge Protective Device, 220-240V

P/N Extended Warranties

2359534	XM3150 1-Year Renewal Parts Only Guarantee with Maintenance kit
2359740	XM3150 Upgrade to Parts and Labour, Total 4 years (1+3)
2359742	XM3150 1-Year Renewal Parts and Labour with Maintenance kit
2358232	XM3150 Upgrade to Onsite Service, Total 4 years (1+3)
2359583	XM3150 1-Year Renewal Onsite Service with Maintenance kit

P/N User Replaceable Parts

41X0958	Pick Tire
40X8443	Tray Pick roller assembly
40X9110	ADF Pick Roll pad

P/N Installation Service

2355249	Standard Installation Service
---------	-------------------------------

P/N Service Parts

40X9138	MX61x Fuser Maintenance Kit, 220-240V
40X9108	ADF Separator Roller
40X9082	MX61x Redrive assembly
40X8295	MPF pick roller and separator pad