



# Lexmark XS925de

The Lexmark XS925de colour MFP delivers affordable A3 and colour functionality for your busy workgroup through easy-to-use features, productivity solutions and a compact design.

## Part Number

3084900

## Print Technology

Colour LED

## Function

Colour Copying, Colour Faxing, Colour Printing, Color Scanning, Colour Network Scanning

## Workgroup Size

Medium-Large Workgroup

## Touch Screen Display

Yes

## Display

Lexmark e-Task 10-inch (25 cm) class color touch screen

## Print Speed (A4, Black)

Up to 30 ppm

## Print Speed (A4, Colour)

Up to 30 ppm

## Print Speed (A4, Black) Duplex

Up to 26 spm

## Time to First Page (Black)

As fast as 9 seconds

## Time to First Page (Colour)

As fast as 11 seconds

## Duplex (2-sided) Printing

Integrated Duplex

## Print Resolution, Black

1200 Image Quality, 600 x 600 dpi

## Print Resolution, Colour

1200 Image Quality, 600 x 600 dpi

## Copy Speed (A4, Black)

Up to 30 cpm

## Copy Speed (A4, Colour)

Up to 30 cpm

## Copy Speed (A4, Black) Duplex

Up to 13 spm

## Time to First Copy (Black)

As fast as 17 seconds

## Time to First Copy (Colour)

As fast as 17 seconds

## Reduce / Enlarge Range

25 - 400 %

## A4/Ltr Simplex Scan Speed (Black)

Up to 33/ 32 Sides per minute

## A4/Ltr Simplex Scan Speed (Colour)

Up to 33/ 32 Sides per minute

## A4/Ltr Duplex Scan Speed (Black)

Up to 12 Sides per minute

## A4/Ltr Duplex Scan Speed (Colour)

Up to 12 Sides per minute

## Scan Area, Maximum (mm)

297 x 432 mm

## ADF Scan

RADF (reversing Duplex)

## Scanner Type

Flatbed scanner with ADF

## Scan Technology

CDD

## Optical Scanning Resolution

600 X 600 ppi

## Scan File Formats (Send as)

JPEG, JPG, PDF, Secure PDF, TIFF, XPS, Archival PDF (A-1a, A-1b), Searchable PDF (optional OCR with 1GB RAM and hard disk required), Highly compressed PDF (1GB RAM and hard disk required)

## Scan Destinations

e-mail, FTP, USB Flash drive, USB or Network connected computer, Lexmark Document Solutions Suite (LDSS)

## Modem Speed

33.6 Kbps

## Processor

900 MHz

## Memory, Standard

512 MB

## Memory, Maximum

1536 MB

## Hard Disk

Included in configuration

## Apple Operating Systems Supported

Apple OS X (10.5, 10.6, 10.7, 10.8, 10.9, 10.10)

## Citrix MetaFrame

Microsoft Windows Server 2003 running Terminal Services with Citrix Presentation Server 3.0, 4.0, 4.5, Microsoft Windows Server 2003 and 2003 X64 Edition with Citrix XenApp 5.0, Microsoft Windows Server 2008 and 2008 X64 Edition with Citrix XenApp 5.0

## Linux Operating Systems Supported

SUSE Linux Enterprise Server 10, 11, SUSE Linux Enterprise Desktop 10, 11, Red Hat Enterprise Linux WS 4.0, 5.0, Red Flag Linux Desktop 6.0, Linpus Linux Desktop 9.6, Ubuntu 9.04, 9.10, 10.04, 10.10, Debian GNU/Linux 5.0, 6.0, Ubuntu 11.04, 11.10, 12.04, 12.10, openSUSE 11.3, 11.4, 12.1, 12.2, Fedora 14, 15, 16, 17, Mint 10, 11, 12, 13

## Microsoft Windows Operating Systems Supported

Windows XP, Windows Server 2003, Windows XP x64, Windows Server 2003 x64, Windows Vista, Windows Vista x64, Windows Server 2008, Windows Server 2008 x64, Windows 7, Windows 7 x64, Windows Server 2008 R2, Windows 8, Windows 8 x64, Windows Server 2012, Windows 8.1, Windows 8.1 x64, Windows Server 2012 R2, Windows RT, Windows RT 8.1

## Novell Operating Systems Supported

Novell NetWare 6.5 Open Enterprise Server, Novell NetWare 5.1(SP 6+), 6.0(SP 3+) with Novell Distributed Print Services (NDPS), Novell Open Enterprise Server on SUSE Linux Enterprise Server

## UNIX Operating Systems Supported

Sun Solaris SPARC 8, 9, 10, Sun Solaris x86 10, HP-UX 11.11, 11.23, 11.31, Sun openSolaris SPARC 2010.02, Sun openSolaris X86 2010.02, IBM AIX 5.3, 6.1, 7.1

## Paper Handling Standard

150-Sheet Input Tray, 250-Sheet Output Bin, Integrated Duplex, 250-Sheet Input Tray, 50-Sheet Multipurpose Feeder

## Paper Handling Optional

550-Sheet Drawer

## Paper Input Capacity, Standard

Up to 450 pages 75 gsm bond

## Paper Input Capacity, Maximum

Up to 2100 pages 75 gsm bond

## Paper Output Capacity, Standard

Up to 250 pages 75 gsm bond

## Paper Output Capacity, Maximum

Up to 250 pages 75 gsm bond

## Paper Weight Range Supported - Standard Tray (gsm)

60 - 128 gsm

## Integrated Tray Card Stock Upper limit (grain long)

Index Bristol - 120 gsm (67 lb), Tag - 120 gsm (74 lb), Cover - 135 gsm (50 lb)

## Integrated Tray Card Stock Upper limit (grain short)

Cover - 176 gsm (65 lb), Index Bristol - 163 gsm (90 lb), Tag - 163 gsm (100 lb)

## A3

Yes

## ADF

100-Sheet Automatic Document Feeder

## ADF Paper Input Capacity

Up to 100 pages 75 gsm bond

## ADF Paper Output Capacity

Up to 100 pages 75 gsm bond

## Finishing Option

No

## Number of Paper Inputs, Standard

3

## Number of Paper Inputs, Maximum

6

## Media Types Supported

Card Stock, Envelopes, Labels, Plain Paper, Transparencies, Refer to the Card Stock & Label Guide., Banner Paper

## Media Sizes Supported

10 Envelope, 7 3/4 Envelope, 9 Envelope, A3, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, Executive, Folio, JIS-B4, JIS-B5, Ledger, Legal, Letter, Statement, Universal, Oficio, A6

## Caster Base

Optional, Cabinet with casters, (Use only one 550-Sheet Drawer)

## Standard Ports

USB 2.0 Specification Hi-Speed Certified (Type B), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear USB 2.0 Specification Hi-Speed Certified port (Type A), Ethernet 10/100/1000 BaseTX (RJ-45)

## Optional Local Ports

Internal RS-232C serial, Internal 1284-B Bidirectional Parallel

## Optional Network Ports

External MarkNet™ N7020e Gigabit Ethernet, Internal MarkNet™ N8120 Gigabit Ethernet, Internal MarkNet™ N8130 Fiber Fast Ethernet, Internal MarkNet™ N8250 802.11b/g/n Wireless

## Direct USB

Yes

## Ethernet Network

Yes

## Network Protocol Support

TCP/IP IPv4, AppleTalk™, TCP/IP IPv6, TCP, UDP

## Network Printing Methods

LPR/LPD, Direct IP (Port 9100), HTTP, NDPS/NEPS (Novell Distributed Print Services, Novell Netware Enterprise Print Services), Enhanced IP (Port 9400), FTP, TFTP, IPP 1.1 (Internet Printing Protocol), ThinPrint .print integration

## Network Management Protocols<sup>2</sup>

HTTP, HTTPs (SSL/TLS), SNMPv3, WINS, IGMP, BOOTP, RARP, APIPA (AutoIP), DHCP, ICMP, DNS, SNMPv2c, Bonjour, DDNS, mDNS, ARP, NTP, Telnet, Finger,

## Network Security

SNMPv3, 802.1x Authentication: MD5, MSCHAPv2, LEAP, PEAP, TLS, TTLS, IPsec

## Printable Area (metric)

5 mm of the top, bottom, right and left edges (within)

## Printer Languages (Standard)

PCL 5c Emulation, PCL 6 Emulation, Personal Printer Data Stream (PPDS), PostScript 3 Emulation, xHTML, PDF 1.6 Emulation, Direct Image, Microsoft XPS (XML Paper Specification), AirPrint™

## Fonts and Symbol Sets

3 of 9 scalable PCL 5e fonts in Narrow, Regular and Wide, 158 scalable PostScript fonts, 2 PCL bitmap fonts, 39 scalable PPDS fonts, 5 PPDS bitmap fonts, 84 scalable PCL fonts, OCR-A, OCR-B scalable PCL 5e fonts, For more information, refer to the Technical Reference.

## Supplies Yield<sup>1</sup>

7,500-page Colour (CMY) High Yield Toner Cartridges, 8,500-page Black High Yield Toner Cartridge

## Imaging Unit Estimated Yield

Up to 30,000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage<sup>5</sup>

## Cartridge(s) Shipping with Product

7,500-page Colour (CMY) High Yield Toner Cartridges, 8,500-page Black High Yield Toner Cartridge

## Packaged Size (mm - H x W x D)

1182 x 789 x 798 mm

## Packaged Weight (kg)

110 kg

## Size (mm - H x W x D)

771 x 672 x 668 mm

## Weight (kg)

79.3 kg

## Size, Trays Extended (mm - H x W x D)

1067 x 914 x 1049 mm

## Noise Level, Idle

39 dBA

## Noise Level (Print), Operating

53 dBA

## Duplex Print Noise Level, Operating

55 dBA

## Noise Level (Copy), Operating

54 dBA

## Noise Level (Scan), Operating

54 dBA

## Quiet Mode

54 dBA

## ENERGY STAR

No

## Average Power (Hibernate Mode)

6.1 watts

## Average Power (Sleep Mode)

27 watts

## Average Power (Printing)

650 watts

## Average Power while Printing Duplex

575 watts

## Average Power (Copying)

725 watts

## Average Power (Scanning)

190 watts

## ENERGY STAR Typical Electricity

### Consumption (TEC)

7.803 kilowatt-hours per week

## Product Guarantee

1-year Onsite Service + 3-years Parts Only guarantee (Maintenance Kit included)

## Product Certifications

CAN/CSA-C22.2 60950-1-07, ICES-003 Class A, US FDA, BSMI Class A, CNS 13438, VCCI Class A, FCC Class A, UL 60950-1, EN/IEC 60320-1, NOM-019-SCFI-1998, CE Class A, CB IEC 60950-1, EN 60950-1, EN/IEC 61000-3, EN 55022 Class A, EN 55024, GS (TÜV), SAT, SABS, ZIK, KPSIM, Bel GISS, GOST-R 'Cpt' Mark, N Mark, UL AR, CS, TÜV Rh, ACMA A-tick mark Class A, AS/NZS 60950-1, CCC Class A, CISPIR 22 Class A, MIC Mark, EK-K60950, PSB

## Maximum Monthly Duty Cycle

Up to 200000 pages per month<sup>4</sup>

## Recommended Monthly Page Volume

5000 - 10000 pages<sup>3</sup>

## Specified Operating Environment

Temperature: 10 to 32°C, Humidity: 20 to 80% Relative Humidity, Altitude: 0 - 2300 Meters (7,545 Feet)

## Country of Origin

China (PR)

## UNSPSC Code

43212110


<sup>1</sup>Yield at approximately 5% coverage per colour

<sup>2</sup>This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (<http://www.openssl.org/>)

<sup>3</sup>"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage.

<sup>4</sup>"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs.

<sup>5</sup>Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity.

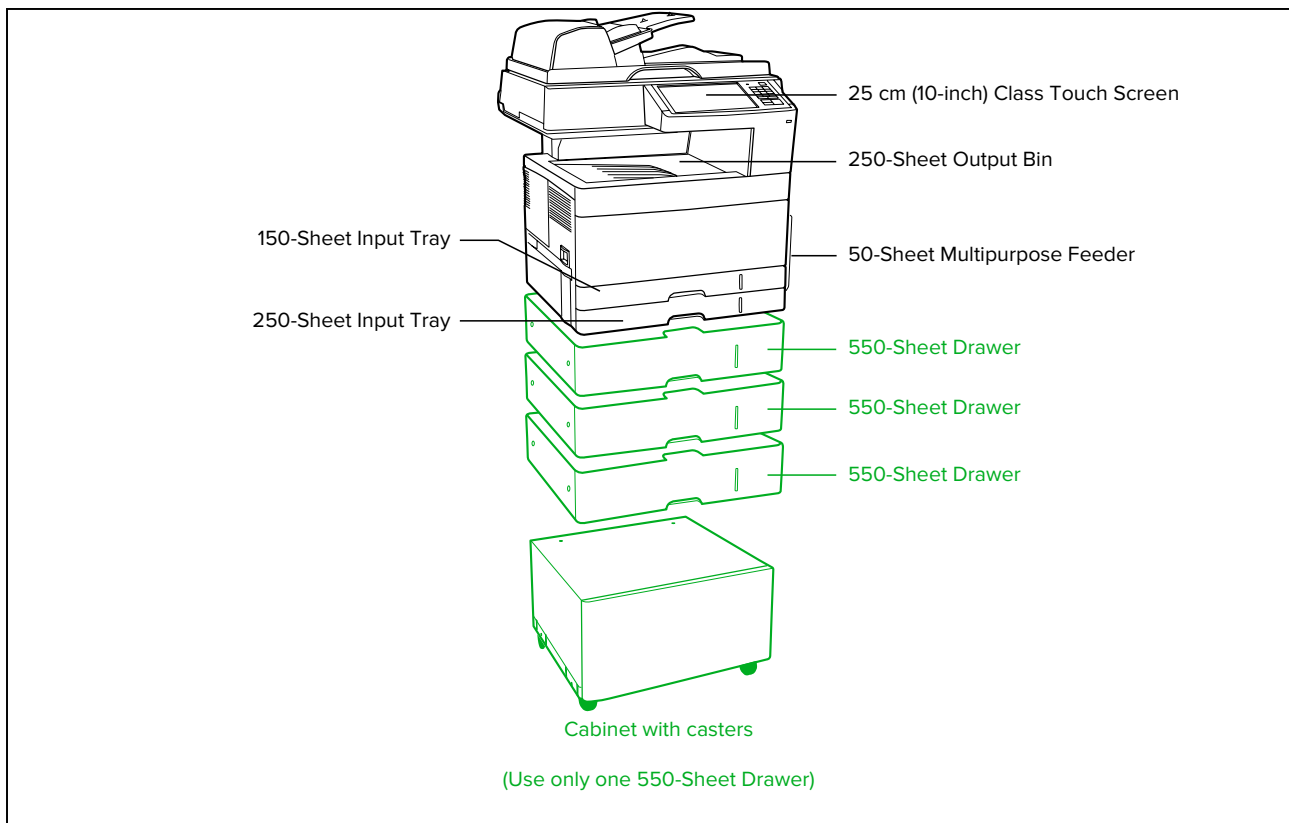

- Standard
- Optional

P/N	Toner Cartridges	P/N	Application Solutions	P/N	Service Parts
C925X72G	C925, X925 Black Imaging Unit (30K)	57X9000	Lexmark PrintCryption Card	40X6457	C925, X925 Multipurpose feeder (MPF) Maintenance kit
C925X73G	C925, X925 Cyan Imaging Unit (30K)			40X6372	C925, X925 Paperfeed maintenance kit
C925X74G	C925, X925 Magenta Imaging Unit (30K)	<b>P/N</b>	<b>Connectivity</b>		
C925X75G	C925, X925 Yellow Imaging Unit (30K)	1021231	Parallel (10') Cable		
C925X76G	C925, X925 Waste Toner Bottle	1021294	USB (2 Meter) Cable		
24Z0037	XS925 Black High Yield Toner Cartridge (8.5K)	14F0100	RS-232C Serial Interface Card		
24Z0034	XS925 Cyan High Yield Toner Cartridge (7.5K)	14F0000	Parallel 1284-B Interface Card		
24Z0035	XS925 Magenta High Yield Toner Cartridge (7.5K)	14F0037	MarkNet N8120 Gigabit Ethernet Print Server		
24Z0036	XS925 Yellow High Yield Toner Cartridge (7.5K)	14F0042	MarkNet N8130 Fiber Ethernet 100BaseFX, 10BaseFL Print Server		
		27X0225	MarkNet N8350 802.11b/g/n Wireless Print Server		
		SPD0002	Surge Protective Device, 220-240V		
		<b>P/N</b>	<b>Extended Warranties</b>		
<b>P/N</b>	<b>Paper Handling</b>	2359546	XS925 1-Year Renewal Parts Only Guarantee with Maintenance kit		
24Z0030	C925, X925 550-Sheet Drawer	2359812	XS925 Upgrade to Parts and Labour, Total 4 years (1+3)		
<b>P/N</b>	<b>Furniture</b>	2359814	XS925 1-Year Renewal Parts and Labour with Maintenance kit		
24Z0031	C925, X925 Cabinet with casters	2358760	XS925 Upgrade to Onsite Service, Total 4 years (1+3)		
<b>P/N</b>	<b>Memory Options</b>	2359595	XS925 1-Year Renewal Onsite Service with Maintenance kit		
1025041	256MB DDR2-DRAM	<b>P/N</b>	<b>User Replaceable Parts</b>		
1025042	512MB DDR2-DRAM	40X6093	C925, X925 Fuser Maintenance Kit 220-240V		
1025043	1024MB DDR2-DRAM	40X6011	C925, X925 Transfer Belt and Roll		
14F0245	256MB Flash Card	40X6328	X925 ADF Maintenance Kit		
30G0825	Korean Font Card	40X6432	X925 Flatbed Cushion		
30G0828	Japanese Font Card	40X6327	X925 ADF Pick Arm		
30G0827	Traditional Chinese Font Card				
30G0826	Simplified Chinese Font Card				
30G0287	Arabic Font Card				
57X0070	Removable Hard Disk Enclosure Kit				
<b>P/N</b>	<b>Application Solutions</b>	<b>P/N</b>	<b>Installation Service</b>		
24Z0043	X925 Card for PRESCRIBE Emulation	2355254	Standard Installation Service		
24Z0041	X925 Forms and Bar Code Card				
24Z0042	X925 Card for IPDS				