



Lexmark C2132

With PANTONE® colour matching, workflow solutions, 2-sided printing and super-fast speeds, the Lexmark C2132 is a workhorse winner.

Part Number

3084898

Print Technology

Color Laser

Workgroup Size

Small-Medium Workgroup

Touch Screen Display

Yes

Display

Lexmark e-Task 10.9 cm (4.3-inch) colour touch screen

Print Speed (A4, Black)

Up to 30 ppm⁶

Print Speed (A4, Colour)

Up to 30 ppm⁶

Print Speed (A4, Black) Duplex

Up to 15 spm⁶

Print Speed (A4, Colour) Duplex

Up to 15 spm⁶

Time to First Page (Black)

As fast as 9 seconds

Time to First Page (Colour)

As fast as 10 seconds

Duplex (2-sided) Printing

Integrated Duplex

Print Resolution, Black

1200 x 1200 dpi, 4800 Colour Quality (2400 x 600 dpi)

Print Resolution, Colour

1200 x 1200 dpi, 4800 Colour Quality (2400 x 600 dpi)

Processor

Dual Core, 800 MHz

Memory, Standard

512 MB

Memory, Maximum

2560 MB

Hard Disk

Option available

Apple Operating Systems Supported

Apple OS X (10.5, 10.6, 10.7, 10.8, 10.9, 10.10)

Citrix MetaFrame

Microsoft Windows Server 2003 x64 running Terminal Services with Citrix Presentation Server 4.0 x64, 4.5 x64, Microsoft Windows Server 2003 running Terminal Services with Citrix Presentation Server 4.0, 4.5, Microsoft Windows Server 2003 and 2003 X64 Edition with Citrix XenApp 5.0, Microsoft Windows Server 2008 and 2008 X64 Edition with Citrix XenApp 5.0, Microsoft Windows Server 2008 R2 with Citrix XenApp 6.0

Linux Operating Systems Supported

SUSE Linux Enterprise Server 10, 11, SUSE Linux Enterprise Desktop 10, 11, Red Hat Linux Desktop 6.0, Linpus Linux Desktop 9.6, Debian GNU/Linux 5.0, 6.0, Red Hat Enterprise Linux WS 4.0, 5.0, 6.0, Ubuntu 11.04, 11.10, 12.04, 12.10, openSUSE 11.3, 11.4, 12.1, 12.2, PCLinuxOS 2011, Mint 9, 10, 11, 12, 13, Fedora 14, 15, 16, 17

Microsoft Windows Operating Systems Supported

Windows XP, Windows Server 2003, Windows XP x64, Windows Server 2003 x64, Windows Vista, Windows Vista x64, Windows Server 2008, Windows Server 2008 x64, Windows 7, Windows 7 x64, Windows Server 2008 R2, Windows 8, Windows 8 x64, Windows Server 2012, Windows 8.1, Windows 8.1 x64, Windows Server 2012 R2, Windows RT, Windows RT 8.1

Novell Operating Systems Supported

Novell NetWare 6.5 Open Enterprise Server, Novell NetWare 5.1(SP 6+), 6.0(SP 3+) with Novell Distributed Print Services (NDPS), Novell Open Enterprise Server on SUSE Linux Enterprise Server

UNIX Operating Systems Supported

HP-UX 11.11, 11.23, 11.31, Sun Solaris SPARC 9, 10, 11, Sun Solaris x86 10, 11, IBM AIX 5.3, 6.1, 7.1

Included Paper Handling

250-Sheet Input, 125-Sheet Output Bin, Integrated Duplex, Single-Sheet Manual Feed

Optional Paper Handling

550-Sheet Tray, 550-Sheet Duo Tray with 100-Sheet Feeder

Paper Input Capacity, Standard

Up to 250+1 pages 75 gsm bond

Paper Input Capacity, Maximum

Up to 1450+1 pages 75 gsm bond

Paper Output Capacity, Standard

Up to 125 pages 75 gsm bond

Paper Output Capacity, Maximum

Up to 125 pages 75 gsm bond

Paper Weight Range Supported - Standard Tray (gsm)

60 - 176 gsm

Integrated Tray Card Stock Upper limit (grain long)

Index Bristol - 120 gsm (67 lb), Tag - 120 gsm (74 lb), Cover - 135 gsm (50 lb)

Finishing Option

No

Number of Paper Inputs, Standard

1

Number of Paper Inputs, Maximum

4

Media Types Supported

Card Stock, Paper Labels, Plain Paper, Transparencies, Refer to the Card Stock & Label Guide.

Media Sizes Supported

A4, A5, Executive, Folio, JIS-B5, Legal, Letter, Universal, Oficio

Standard Ports

USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear USB 2.0 Specification Hi-Speed Certified port (Type A)

Optional Network Ports

MarkNet N8352 802.11b/g/n Wireless

Direct USB

Yes

Ethernet Network

Yes

Network Protocol Support

TCP/IP IPv4, AppleTalk™, TCP/IP IPv6, TCP, UDP

Network Printing Methods

LPR/LPD, Direct IP (Port 9100), Enhanced IP (Port 9400), FTP, TFTP, ThinPrint .print integration, Telnet, IPP 1.0, 1.1, 2.0 (Internet Printing Protocol)

Network Management Protocols¹

HTTP, HTTPS (SSL/TLS), SNMPv1, SNMPv2c, SNMPv3, WINS, IGMP, APIPA (AutoIP), DHCP, ICMP, DNS, Bonjour, DDNS, mDNS, ARP, NTP, Telnet, Finger,

Network Security

SNMPv3, 802.1x Authentication: MD5, MSCHAPv2, LEAP, PEAP, TLS, TTLS, IPsec

Printable Area (metric)

4.2 mm of the top, bottom, right and left edges (within)

Printer Languages (Standard)

PCL 5c Emulation, PCL 6 Emulation, Personal Printer Data Stream (PPDS), PostScript 3 Emulation, Direct Image, Microsoft XPS (XML Paper Specification), AirPrint™, PDF 1.7 emulation

Fonts and Symbol Sets

3 of 9 scalable PCL 5e fonts in Narrow, Regular and Wide, 158 scalable PostScript fonts, 2 PCL bitmap fonts, 39 scalable PPDS fonts, 5 PPDS bitmap fonts, 84 scalable PCL fonts, OCR-A, OCR-B scalable PCL 5e fonts, For more information, refer to the Technical Reference.

Laser Cartridge Yields (up to)⁵

3,000-page Colour (CMY) Extra High Yield Cartridges, 6,000-page Black Extra High Yield Cartridge,

Photoconductor Estimated Yield

Up to 40,000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage⁴

Cartridge(s) Shipping with Product

6,000-page Black Starter Return Program
Toner Cartridge, 4,000-page Colour (CMY)
Extra High Yield Return Program Toner
Cartridges

Packaged Size (mm - H x W x D)

402 x 595 x 495 mm

Packaged Weight (kg)

24.3 kg

Size (mm - H x W x D)

306 x 442 x 407 mm

Weight (kg)

20.9 kg

Noise Level, Idle

16 dBA

Noise Level (Print), Operating

50 dBA

Duplex Print Noise Level, Operating

52 dBA

Quiet Mode

46 dBA

ENERGY STAR

Yes

Average Power (Hibernate Mode)

0.5 watts

Average Power (Sleep Mode)

3 watts

Average Power (Ready Mode)

30 watts

Average Power (Printing)

580 watts

Average Power while Printing Duplex

360 watts

**ENERGY STAR Typical Electricity
Consumption (TEC)**

2.5 kilowatt-hours per week

Product Guarantee

1-year Onsite Service + 3-years Parts Only
guarantee (Maintenance Kit included)

Product Certifications

ENERGY STAR, Blue Angel RAL-UZ-171,
ICES-003 Class B, BSMI Class B, VCCI
Class B, US FDA, UL 60950-1, FCC Class B,
cUL CAN/CSA-C22.2 60950-1, CB EN/IEC
60950-1, CB EN/IEC 60825-1, CE DoC (EN
62301 Class B, EN 62311, CE EN/IEC 60950-1,
CE EN/IEC 60825-1, EN 61000-3, EN 55022
Class B, EN 55024, UL), EFTA (CE), KCC, CCC,
CECP, CEL, C-tick DoC, UL-AR, KC mark, UL
GS mark, UCRF, EC 1275

Maximum Monthly Duty Cycle

Up to 85000 pages per month³

Recommended Monthly Page Volume

1500 - 7000 pages²

Specified Operating Environment

Temperature: 16 to 32°C (60 to 90°F),
Humidity: 8 to 80% Relative Humidity, Altitude:
0 - 2896 Meters (9,500 Feet)

License/Agreement Terms

Printers are sold subject to certain license/
agreement conditions. See [www.lexmark.com/
printerlicense](http://www.lexmark.com/printerlicense) for details.

Country of Origin

China (PR)

UNSPSC Code

43212105

¹This product includes software developed by the
OpenSSL Project for use in the OpenSSL Toolkit. ([http://
www.openssl.org/](http://www.openssl.org/))

²"Recommended Monthly Page Volume" is a range of pages
that helps customers evaluate Lexmark's product offerings


based on the average number of pages customers plan to
print on the device each month. Lexmark recommends that
the number of pages per month be within the stated range
for optimum device performance, based on factors including:
supplies replacement intervals, paper loading intervals,
speed, and typical customer usage.

³"Maximum Monthly Duty Cycle" is defined as the maximum
number of pages a device could deliver in a month using a
multishift operation. This metric provides a comparison of
robustness in relation to other Lexmark printers and MFPs.

⁴Actual Yield may vary based on other factors such as device
speed, paper size and feed orientation, toner coverage, tray
source, percentage of black-only printing and average print
job complexity.

⁵Average yield at approximately 5% print coverage per
colour.

⁶Print and copy speeds measured in accordance with ISO/
IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more
information see: www.lexmark.com/ISOspeeds.

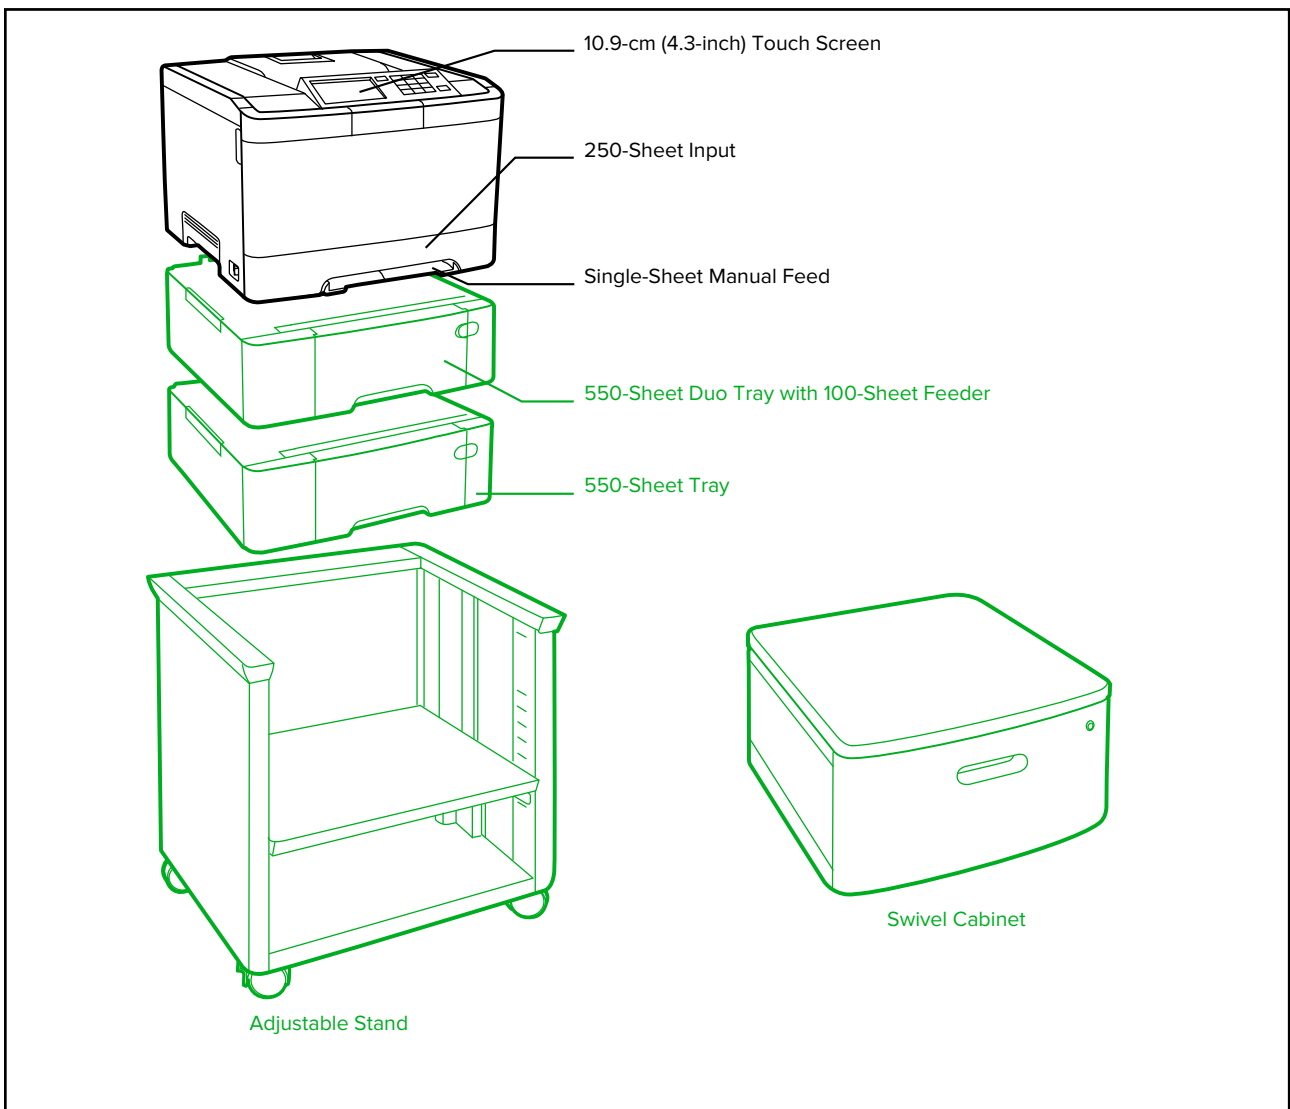

- Standard
- Optional

P/N Toner Cartridges

C540X75G	Waste Toner Bottle (18K)
70C0Z50	700Z5 Black and Colour Imaging Kit
70C0Z10	700Z1 Black Imaging Kit
70C0P00	700P Photoconductor Unit
70C0D20	700D2 Cyan Developer Unit
70C0D30	700D3 Magenta Developer Unit
70C0D40	700D4 Yellow Developer Unit
70C0D10	700D1 Black Developer Unit
24B6011	Black Toner Cartridge
24B6008	Cyan Toner Cartridge
24B6009	Magenta Toner Cartridge
24B6010	Yellow Toner Cartridge

P/N Paper Handling

38C0626	550-Sheet Duo Tray with 100-Sheet Feeder
38C0636	550-Sheet Tray

P/N Furniture

3073173	Swivel Cabinet
35S8502	Adjustable Stand

P/N Memory Options

27X0200	320+ GB Hard Disk
57X9016	1024MBx32 DDR3-DRAM

P/N Memory Options

57X9012	2048MBx32 DDR3-DRAM
57X9101	256MB Flash Memory Card

P/N Application Solutions

57X0300	Contact Authentication Device
57X0301	Contactless Authentication Device
38C0512	CS510 Forms and Bar Code Card
38C0517	CS510 Card for PRESCRIBE Emulation

P/N Connectivity

1021294	USB (2 Meter) Cable
27X0130	MarkNet N8352 802.11b/g/n Wireless Print Server Kit
27X0135	MarkNet N8352 Wireless Print Server plus NFC
SPD0002	Surge Protective Device, 220-240V

P/N Extended Warranties

2359527	C2132 1-Year Renewal Parts Only Guarantee with Maintenance kit
2359698	C2132 Upgrade to Parts and Labour, Total 4 years (1+3)
2359700	C2132 1-Year Renewal Parts and Labour with Maintenance kit

P/N Extended Warranties

2357904	C2132 Upgrade to Onsite Service, Total 4 years (1+3)
2359576	C2132 1-Year Renewal Onsite Service with Maintenance kit

P/N User Replaceable Parts

40X5168	Pick Tire
---------	-----------

P/N Installation Service

2355248	Standard Installation Service
---------	-------------------------------

P/N Service Parts

40X7616	Fuser Maintenance kit, 220-240V
40X7610	Image Transfer Unit
40X7623	Fuser, 220-240V